





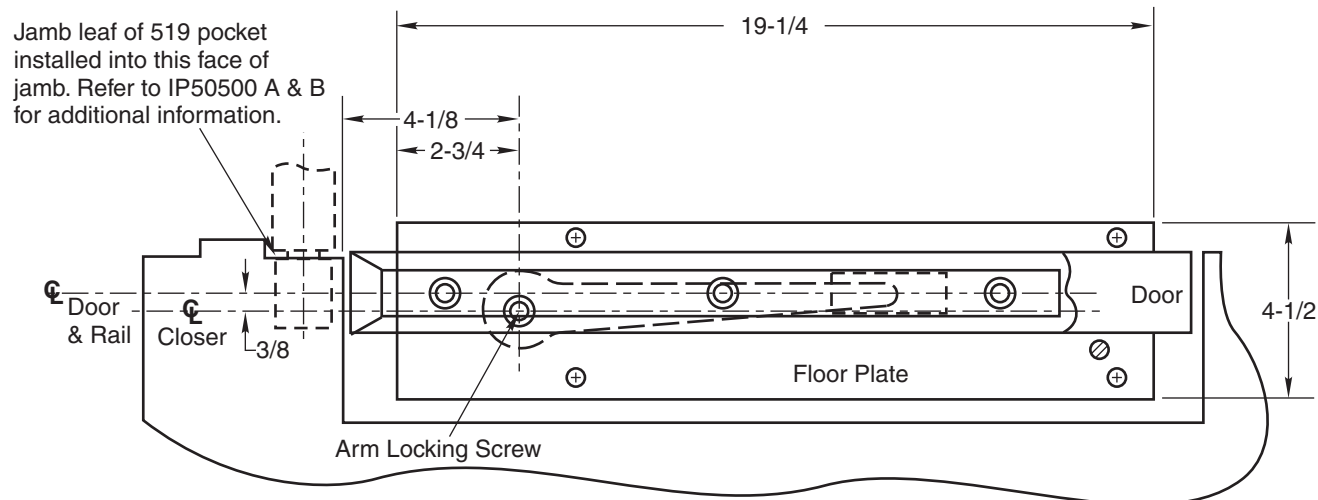


**Notes:**

1. Do not scale drawing.
2. Right Hand Shown.
3. All dimensions given in inches.  
Conversion from inches to metric:  
inch x 25.4
4. Solid door line represents door in open position with closer wound. Dashed door line represents door in closed position with closer at rest.
5. See IP50500 A & B for door mortising.
6. Consult factory for door thickness other than 1-3/4" or for extended spindle lengths.

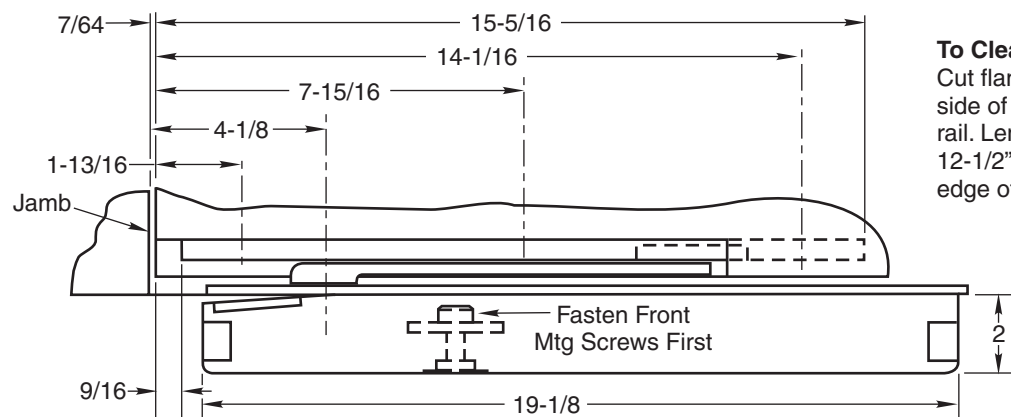

**To Clear Arm –**  
Cut flange off pull side of door below rail. Length of cut 12-1/2" from hinge edge of door.

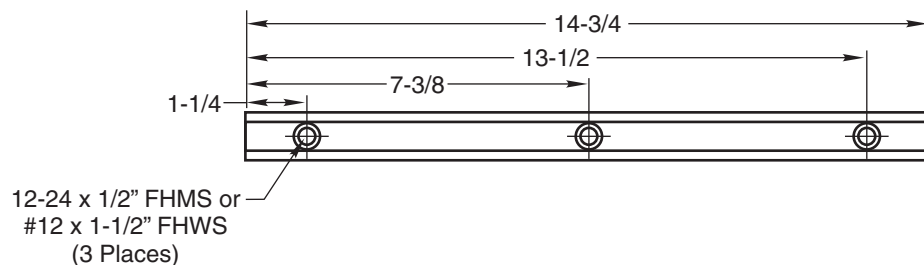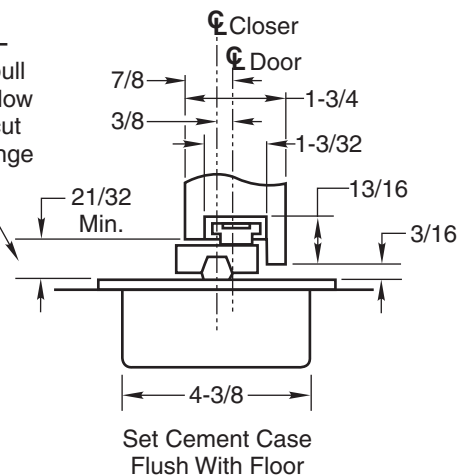

**5310 Floor Closer  
Pocket Pivot Application**

**RIXSON®**  
**ASSA ABLOY**

www.rixson.com

TEMPLATE NUMBER

**OS10610**

DATE

**12-08**