No. 741 Shelf Bracket


Application:

For use with surface-mounted wall standards and glass or wood shelves. See page 2.6 for shelf rest clips.

Features:

1/8" thick tempered steel. Stabilizing pin reduces sway.

Stock Finish:



Part Number	Length	Packed/Ctn.	Wt./Ctn.
741-10	10"	12	4 Lbs.
741-12	12"	12	5 ¼ Lbs.
741-14	14"	12	7 ¼ Lbs.
741-16	16"	12	8 ¼ Lbs.
741-18	18"] 1	1½" 12	10 ¼ Lbs.

No. 742 Shelf Bracket

Application:

For use with concealed/recessed/"T" standards and glass or wood shelves.


See page 2.6 for shelf rest clips.

Features:

1/4" thick tempered steel.

Stock Finish: Brillatone

(Satin Zinc) and Polished Chrome.



Part Number	Length	Packed/Ctn.	Wt./Ctn.
742-8	8"	24	6 Lbs.
742-10	10"	24	8 Lbs.
742-12	12"	24	10 ½ Lbs.
742-14	14"	24	14 ½ Lbs.
742-16	16"	24	16 ½ Lbs.
742-18	18"] 1	1 1/2" 12	20 ½ Lbs.

No. 743 Shelf Bracket (Adjustable Downslant)

Application:

For use on perimeters and loose fixtures with downslant shelves.


Features:

Tempered Steel. Made of medium duty .080" thick material.

Downslant of 7°, 15°, 30°, 45°, 60° and straight on 8", 10" and 12" Brackets. Downslant of 7°, 15°, 30°, 45°, 60°, and straight on 14" and 16" Brackets.

Stock Finish:

Brillatone (Satin Zinc).



Part Number	Length	Packed/Ctn.	Wt./Ctn.
743-10	10"	12	4 ½ Lbs.
743-12	12"	12	5 Lbs.
743-14	14"	12	7 Lbs.
743-16	16"	12	7 ¾ Lbs.

No. 761 Shelf Bracket

Application:


Use for heaviest loads. For use with glass or wood shelves. See page 2.6 for shelf rest clips.

Features:

1/8" thick tempered steel. Uphook for additional stability and safety.

Stock Finish:

Brillatone (Satin Zinc).



Part Number	Length	Packed/Ctn.	Wt./Ctn.
761-10	10"	24	10 Lbs.
761-12	12"	24	12 Lbs.
761-14	14"	24	14 ½ Lbs.
761-16	16"	12	17 ¼ Lbs.
761-18	18"	12	18 ¼ Lbs.
761-20	20"	12	20 Lbs.
761-22	22"	12	22 Lbs.
761-24	24"	12	24 Lbs.



No. 762 Shelf Bracket

Application:


Use for heaviest loads. For use with glass or wood shelves. See page 2.6 for shelf rest clips.

Features:

1/8" thick tempered steel. Uphook for additional stability and safety. Locknut thumbscrew reduces sway.

Stock Finish:

Brillatone (Satin Zinc).




Part Number	Length	Packed/Ctn.	Wt./Ctn.
762-10	10"	12	11 Lbs.
762-12	12"	12	12 Lbs.
762-14	14"	12	15 Lbs.
762-16	16"	12	17 ½ Lbs.
762-18	18"	12	18 ¼ Lbs.
762-20	20"	12	20 Lbs.
762-22	22"	12	22 Lbs.
762-24	24"	12	24 Lbs.


No. 766 Shelf/Hangrod Bracket

Application:

Use for heaviest loads. Use with surface mounted wall standards on perimeters, loose fixtures, shelving, and hangrod. See page 2.6 for shelf rest clips.

1/8" thick tempered steel. Locknut thumb screw reduces sway. Uphook for



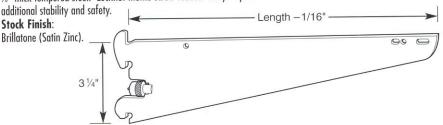

Part Number	Length	Packed/Ctn.	Wt./Ctn.
766-8	8"	12	8 Lbs.
766-10	10"	12	10 Lbs.
766-12	12"	12	12 Lbs.
766-14	14"	12	14 ½ Lbs.
766-16	16"	12	17 ¼ Lbs.
766-18	18"	12	18 1/4 Lbs.
766-20	20"	12	20 Lbs.

No. 767 Shelf/Hangrod Bracket

Application:


Use for heaviest loads. Use with concealed/recessed/"T" standard on perimeters, loose fixtures, shelving, and hangrod. See page 2.6 for shelf rest clips.

Features:

1/8" thick tempered steel. Uphook for additional stability and safety.

Stock Finish:

Brillatone (Satin Zinc) and Polished Chrome.

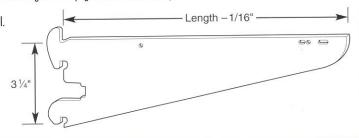

Part Number	Length	Packed/Ctn.	Wt./Ctn.
767-8	8"	12	8 Lbs.
767-10	10"	24	10 Lbs.
767-12	12"	24	12 Lbs.
767-14	14"	24	14 ½ Lbs.
767-16	16"	12	17 ¼ Lbs.
767-18	18"	12	18 ¼ Lbs.
767-20	20"	12	20 Lbs.

No. 723 Wood Shelf Bracket

Application:


For use with wood shelves.

Features:

Keyhole slots for wood shelf mounting. Stabilizer reduces sway. Bracket is made of .085" thick medium duty material.


Stock Finish:

Brillatone (Satin Zinc).



Part Number	Length	Packed/Ctn.	Wt./Ctn.
723-R/L-10	10"	12	8 ¾ Lbs.
723-R/L-12	12"	12	10 ¼ Lbs.
723-R/L-14	14"	12	11 ¾ Lbs.
723-R/L-16	16"	12	13 ¼ Lbs.
723-R/L-18	18"	12	15 Lbs.
723-R/L-20	20"	12	16 ½ Lbs.
723-R/L-22	22"	12	19 ¾ Lbs.





No. 770 Cornice Bracket

Application

Use with concealed or surface mounted standards for most cornice or facia installations.

Features:

Bracket with uphook for additional stability and safety. $1'' \times 1 \frac{1}{2} '' \times 24''$ long tube. Adjustable insert allows additional 12'' extension. $\frac{1}{2} ''$ thick tempered steel stub bracket.

Stock Finish: Brillatone (Satin Zinc).

Part Number	Adj. Length	Packed/Ctn.	Wt./Ctn.
770	24"-36"	2	9 ½ Lbs.

*Can be made to exact length required. Locknut thumb screw can be added to reduce sway.

No. A748 Adjustable Gusset Faceout



For merchandising on perimeters, loose fixtures, and back islands.

Features:


Welded, ground, and polished end cap. Tab or flush end cap available. Adjustable $\frac{1}{2}$ thick gusset allows for flush installation.

Stock Finish:

Made-to-order.

Part Number	Length	
A748-X	Made-to-order	

*Can be made to exact length required.



No. V748 Straight Faceout

Application:

For merchandising on perimeters and loose fixtures.

Features:

reatures:


Plastic end cap. ½" x 1 ½" tube. ½" thick tempered steel stub bracket.

Stock Finish:

Value Line Chrome.

Part Number	Length	Packed/Ctn.	Wt./Ctn.
V748-12	12"	12	15 Lbs.

*Can be made to exact length required. Locknut thumb screw can be added to reduce sway.



No. 748 Straight Faceout

Application:

For merchandising on perimeters and loose fixtures.

Welded, ground, and polished end cap.


1/2" x 1 1/4" tube. Flush end cap available. 1/4" thick tempered steel stub bracket.

Stock Finish:

Polished Chrome.

Part Number	Length	Packed/Ctn.	Wt.
748-6	6"	12	6 Lbs.
748-12	12"	12	15 Lbs.

*Can be made to exact length required. Locknut thumb screw can be added to reduce sway.



No. 747 Waterfall Faceout

Application:

For merchandising on perimeters and loose fixtures.

Features:

30° downslant. Welded, ground, and polished end cap. $\frac{1}{2}$ " x 1 $\frac{1}{4}$ " tube.

1/8" thick tempered steel stub bracket.

Stock Finish:

Polished Chrome.

Part Number	Length	Packed/Ctn.	Wt./Ctn.
747-12-B	12" (5 Balls)	12	15 Lbs.
747-16-B	16" (6 Balls)	12	17 Lbs.

*Can be made to exact length required. Locknut thumb screw can be added to reduce sway. Can be made with cube stops also.



No. 743-L Shelf Rest (Left)

Part Number	Packed/Ctn.	Wt./Ctn.	
743-L	144	4 Lbs.	



Application:

Use with shelf brackets with mounting holes. Designed for flush fit with bracket and shelf.

Features:

Swivel-lock. Gray rubber suction cushions are included to secure glass shelves.

Stock Finish:

Brillatone (Zinc).

No. 743-C Shelf Rest (Center)

Part Number	Packed/Ctn.	Wt./Ctn.
743-C	144	6 Lbs.



Application:

Use with shelf brackets with mounting holes.
Designed for center brackets and at ends with shelf overhang.

Features:

Swivel-lock. Gray rubber suction cushions are included to secure glass shelves.

Stock Finish: Brillatone (Zinc).

No. 743-R Shelf Rest (Right)

Part Number	Packed/Ctn.	Wt./Ctn. 4 Lbs.	
743-R	144		



Application:

Use with shelf brackets with mounting holes.
Designed for flush fit with bracket and shelf.

Features:

Swivel-lock. Gray rubber suction cushions are included to secure glass shelves.

Stock Finish:

Brillatone (Zinc).

No. 743-P-L Shelf Rest (Left)

Part Number	Packed/Ctn.	Wt./Ctn.
743-P-L	144	2 Lbs.



Application:

Made of clear lexan plastic for use with special finish brackets to maintain a clean profile.

Features:

Swivel-lock. Clear suction cushions are included to secure glass shelves.

No. 743-P-C Shelf Rest (Center)

Part Number	Packed/Ctn.	Wt./Ctn.
743-P-C	144	3 Lbs.



Application:


Made of clear lexan plastic for use with special finish brackets to maintain a clean profile. Designed for center brackets and at ends with shelf overhang.

Features:

Swivel lock. Clear suction cushions are included to secure glass shelves.

No. 743-P-R Shelf Rest (Right)

Part Number	Packed/Ctn.	Wt./Ctn.
743-P-R	144	2 Lbs.



Application:


Made of clear lexan plastic for use with special finish brackets to maintain a clean profile.

Features:

Swivel lock. Clear suction cushions are included to secure glass shelves.

No. W-743-L Shelf Rest (Left)

Part Number	Packed/Ctn.	Wt./Ctn.
W-743-L	144	5 Lbs.



Application:

Double width for added safety.

Designed for flush fit with bracket and shelf.


Features:

Swivel-lock. Gray rubber suction cushions are included to secure glass shelves.

Stock Finish: Brillatone (Zinc).

No. W-743-C Shelf Rest (Center)

Part Number	Packed/Ctn.	Wt./Ctn.	
W-743-C	144	6 Lbs.	



Application:

Double width for added safety.

Designed for center brackets and at ends with shelf overhang.


Features:

Swivel-lock. Gray rubber suction cushions are included to secure glass shelves.

Stock Finish: Brillatone (Zinc).

No. W-743-R Shelf Rest (Right)

Part Number	Packed/Ctn.	Wt./Ctn.	
W-743-R	144	5 Lbs.	



Application:

Double width for added safety.
Designed for flush fit with bracket and shelf.

Features:


Swivel-lock. Gray rubber suction cushions are included to secure glass shelves.

Stock Finish: Brillatone (Zinc).

Some items can be made-to-order in a wide variety of plated or powder coated finishes.



No. V725-2 Hangrod Bracket



Application:

Fits 700 Line.

Designed for use with No. 225 hangrod and faceouts.

Features:

3/16" thick saddle. Uphook for added strength and stability.


Stock Finish:

Value Line Chrome.

Part Number	Length	Packed/Ctn.	Wt./Ctn.
V725-2	2"	12	7 Lbs.

^{*}Can add locknut thumb screw to reduce sway.

No. 725-4 Hangrod Bracket



*Can add locknut thumb screw to reduce sway. Can be made to exact length required.

Application:

Designed for use with No. 225 Hangrod and 700 Series Standards.

Features

Uphook for added strength and stability. 3/6" thick saddle.


Left hand and right hand available.

Stock Finish:

Polished Chrome.

Part Number	Length	Packed/Ctn.	Wt./Ctn.
725-L/C/R-4	4"	12	7 ¼ Lbs.

No. V765-12 Hangrod Bracket



Application:

For use with No. 225 Hangrod and 700 Series Standards.

Features:


 $\frac{3}{6}$ " thick saddle. $\frac{1}{2}$ " x 1 $\frac{1}{2}$ " tube.

Stock Finish:

Value Line Chrome.

Part Number	Length	Packed/Ctn.	Wt./Ctn.
V765-12	12"	12	13 Lbs.

No. 725-12 Hangrod Bracket



Application:

Designed for use with No. 225 Hangrod and 700 Series Standards.

Features:

Uphook for added strength and stability. $\frac{3}{6}$ " thick saddle. Left hand and right hand available.

Stock Finish:

Polished Chrome.

Part Number	Length	Packed/Ctn.	Wt./Ctn.
725-L/C/R-12	12"	12	13 Lbs.

