

CRL Jackson Overhead Concealed Door Closer Accessories

CRL Jackson Side-Load Center-Hung Top Arm Assembly

- 1/2" (12 mm) Depth Top Rail

This Adjustable Side-Load Top Arm has an adjusting screw at the end of the Arm to allow the door to be adjusted in or out to match the jambs. The two bolts in the other end of the Arm adjust the centering of the door. Used in 1/2" (12 mm) deep top rails with a notch in the side of the door. Minimum order is one each.

NOTE: For additional accessories see pages 461H to 463H. All CRL and Jackson Brand accessories are interchangeable.



CAT. NO. 20400B

CRL Jackson "A" Type End-Load Center-Hung Top Arm Assembly

- 1" (25 mm) Depth Top Rail

"A" Type End-Load Top Arms have no lateral adjustment. The two bolts in the end of the Arm adjust the centering of the door. Used in 1" (25 mm) depth top rails with an opening at the end of the rail. Minimum order is one each.



CAT. NO. 202000

CRL Jackson "PT" Type End-Load Center-Hung Top Arm Assembly

- 7/8" (22 mm) Depth Top Rail

"PT" Type End-Load Top Arms have no lateral adjustment. The two bolts in the end of the Arm adjust the centering of the door. Used in 7/8" (22 mm) depth top rails with an opening at the end of the rail. Minimum order is one each.



CAT. NO. 202010

CRL Jackson "K" Type End-Load Center-Hung Top Arm Assembly

- 5/8" (16 mm) Depth Top Rail


"K" Type End-Load Top Arms have no lateral adjustment. The two bolts in the end of the Arm adjust the centering of the door. Used in 5/8" (16 mm) depth top rails with an opening at the end of the rail. Minimum order is one each.



CAT. NO. 202085

CRL Replacement Hardware

- Arm Blocks Fit Side-Load and End-Load Center-Hung Arms

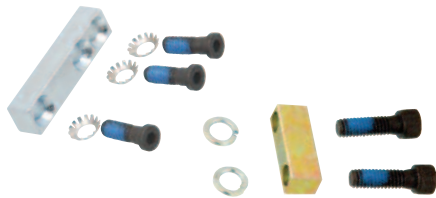

CAT. NO.	DESCRIPTION
SLB3	Side-Load Arm Block With Three Screws
SLS1	Side-Load Arm Screws and Lock Washers Only – Three Per Pkg.
ELB2	End-Load Arm Block With Two Screws
ELS1	End-Load Arm Screws and Lock Washers Only – Two Per Pkg.

Minimum order: 1 set.

CRL Jackson Cover Plates for Overhead Concealed Door Closers



- Two or Three Valve Access Holes

Holes for spindle and two or three valve access are pre-fabricated. Plates have square corners and measure 3-11/16" x 13-3/4" (94 x 349 mm).

CAT. NO.	VALVES	FINISH
20190628	2	Aluminum
20190313	2	Dark Bronze
203147628	3	Aluminum
203147313	3	Dark Bronze

Minimum order: 1 each.